




InduSmart® Monitor



PRODUCT FEATURES


- 15.6~32 inch Full View High Quality Display
- 4K Resolution (Max optional)
- IP65 Front
- VESA Mount
- PCAP Multi Touch (Resistive on request)
- Metal Enclosure
- 2 Year Warranty



VESA Mounting



Touch screen




x86 Processor



IP65 (front side)



Fanless design



Temperature

ORDER INFORMATION

Cat. No.	Resolution	Display size
DSM-C156MB	1920 x 1080	15.6 inch
DSM-C185MB	1920 x 1080	18.5 inch
DSM-C215MB	1920 x 1080	21.5 inch
DSM-C238MB	1920 x 1080	23.8 inch
DSM-C270MB	1920 x 1080	27 inch
DMM-C238MB	3840 x 2160	23.8 inch

Other configurations and interfaces on request.




PRODUCT PERFORMANCE

SPECIFICATION	DSM-C156MB	DSM-C185MB	DSM-C215MB
Screen Dimension (Inch)	15.6	18.5	21.5
Display Resolution	1920 x 1080	1920 x 1080	1920 x 1080
Aspect Ratio	16:9	16:9	16:9
Luminance (cd/m ²)	300 / 500 / 800	300 / 500 / 800	300 / 500 / 800
Backlight Life (hour)	50K	50K	30K
Contrast Ratio	800:1	1000:1	1000:1
Op. Temperature	0°C ~ +50°C	0°C ~ +50°C	0°C ~ +50°C
Storage Temperature	-20°C ~ +75 °C	-20°C ~ +75 °C	-20°C ~ +75 °C

SPECIFICATION	DSM-C238MB	DSM-C270MB	DMM-C238MB
Screen Dimension (Inch)	23.8	27	23.8
Display Resolution	1920 x 1080	1920 x 1080	3840 x 2160 (eDP)
Aspect Ratio	16:9	16:9	16:9
Luminance (cd/m ²)	300 / 500 / 800	300 / 500 / 800	300 / 500 / 800
Backlight Life (hour)	50K	50K	30K
Contrast Ratio	1000:1	1000:1	1000:1
Op. Temperature	0°C ~ +50°C	0°C ~ +50°C	0°C ~ +50°C
Storage Temperature	-20°C ~ +75 °C	-20°C ~ +75 °C	-20°C ~ +75 °C

GENERAL	
Touch	PCAP Multi Touch (Resistive on request)
Bonding	Air bonding (OCA bonding on request)
Housing Material	Aluminium / SECC metal
Mounting	VESA (Wall / Panel Mount optional)
USB Ports	For PCAP Touch
Display port	HDMI / VGA / DVI (DICOM, for "DMM" series)
Sound	Phone jack (Built-in speaker on request)
Waterproof	IP65 (front)
Certificates	CE, FCC, RoHS, Reach
Glass surface treatment	AG (AF / AR on request)
Power Input	DC Jack 12V
OTHER	
Accessories	Power adaptor (Input 100~240V AC, Output 12V DC), USB / HDMI Cable
Warranty	2 Year

STANDARD I/O



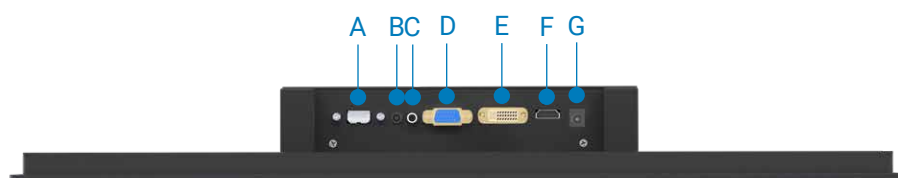


A: USB for Touch
 B: EARPHONE OUT
 C: PC AUDIO IN
 D: VGA
 E: DVI
 F: HDMI
 G: DC 12V




*Ports for standard monitor "DSM" series only.







DIMENSIONAL DRAWING (IN MM)

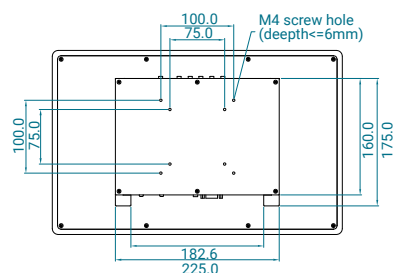




DSM-C156MB

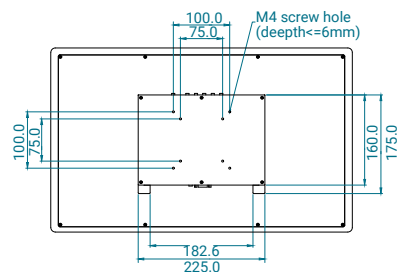

DSM-C185MB

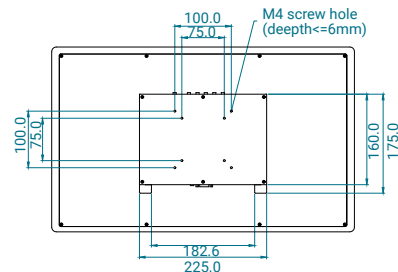




DSM-C215MB

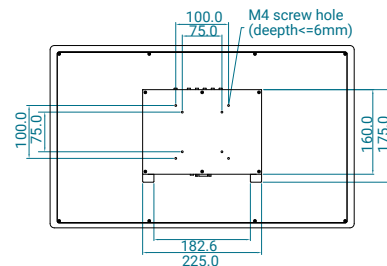




DSM-C238MB



DIMENSIONAL DRAWING (IN MM)

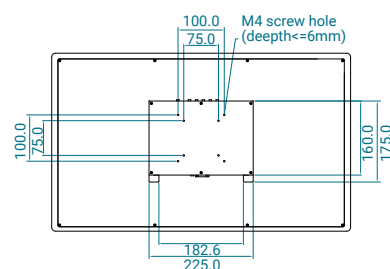

DSM-C270MB

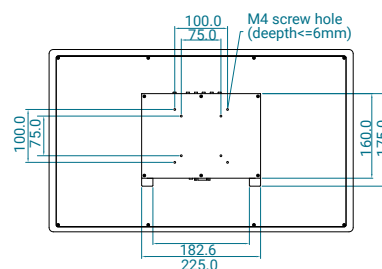

DMM-C238MB